

FORM PTO-1390  
(REV 10-95)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371**

7246/57889

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

**09/424684**INTERNATIONAL APPLICATION NO.  
PCT/JP99/01599INTERNATIONAL FILING DATE  
March 29, 1999PRIORITY DATE CLAIMED  
March 30, 1998TITLE OF INVENTION  
**Audio Reproducing Apparatus**APPLICANT(S) FOR DO/EO/US  
**Kiyofumi Inanaga and Yuji Yamada**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☐ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendemnts has NOT expired.
  - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

**Items 11. to 16. below concern document(s) or information included:**

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:
  - 1.) Formal Drawings
  - 2.) International Search Report
  - 3.) Verification of Translation
  - 4.) Signed Declaration

1.  $\mathcal{H}$  is a Hilbert space.  
 2.  $\mathcal{H}$  is a Banach space.  
 3.  $\mathcal{H}$  is a normed space.  
 4.  $\mathcal{H}$  is a metric space.  
 5.  $\mathcal{H}$  is a topological space.  
 6.  $\mathcal{H}$  is a vector space.  
 7.  $\mathcal{H}$  is a linear space.  
 8.  $\mathcal{H}$  is a module.  
 9.  $\mathcal{H}$  is an algebra.  
 10.  $\mathcal{H}$  is a ring.  
 11.  $\mathcal{H}$  is a field.  
 12.  $\mathcal{H}$  is a division ring.  
 13.  $\mathcal{H}$  is a skew field.  
 14.  $\mathcal{H}$  is a quaternion algebra.  
 15.  $\mathcal{H}$  is a central simple algebra.  
 16.  $\mathcal{H}$  is a matrix algebra.  
 17.  $\mathcal{H}$  is a Lie algebra.  
 18.  $\mathcal{H}$  is a Jordan algebra.  
 19.  $\mathcal{H}$  is a Hopf algebra.  
 20.  $\mathcal{H}$  is a quantum group.  
 21.  $\mathcal{H}$  is a quantum algebra.  
 22.  $\mathcal{H}$  is a quantum field theory.  
 23.  $\mathcal{H}$  is a quantum gravity.  
 24.  $\mathcal{H}$  is a quantum cosmology.  
 25.  $\mathcal{H}$  is a quantum mechanics.  
 26.  $\mathcal{H}$  is a quantum electrodynamics.  
 27.  $\mathcal{H}$  is a quantum chromodynamics.  
 28.  $\mathcal{H}$  is a quantum field theory.  
 29.  $\mathcal{H}$  is a quantum gravity.  
 30.  $\mathcal{H}$  is a quantum cosmology.  
 31.  $\mathcal{H}$  is a quantum mechanics.  
 32.  $\mathcal{H}$  is a quantum electrodynamics.  
 33.  $\mathcal{H}$  is a quantum chromodynamics.  
 34.  $\mathcal{H}$  is a quantum field theory.  
 35.  $\mathcal{H}$  is a quantum gravity.  
 36.  $\mathcal{H}$  is a quantum cosmology.  
 37.  $\mathcal{H}$  is a quantum mechanics.  
 38.  $\mathcal{H}$  is a quantum electrodynamics.  
 39.  $\mathcal{H}$  is a quantum chromodynamics.  
 40.  $\mathcal{H}$  is a quantum field theory.  
 41.  $\mathcal{H}$  is a quantum gravity.  
 42.  $\mathcal{H}$  is a quantum cosmology.  
 43.  $\mathcal{H}$  is a quantum mechanics.  
 44.  $\mathcal{H}$  is a quantum electrodynamics.  
 45.  $\mathcal{H}$  is a quantum chromodynamics.  
 46.  $\mathcal{H}$  is a quantum field theory.  
 47.  $\mathcal{H}$  is a quantum gravity.  
 48.  $\mathcal{H}$  is a quantum cosmology.  
 49.  $\mathcal{H}$  is a quantum mechanics.  
 50.  $\mathcal{H}$  is a quantum electrodynamics.  
 51.  $\mathcal{H}$  is a quantum chromodynamics.  
 52.  $\mathcal{H}$  is a quantum field theory.  
 53.  $\mathcal{H}$  is a quantum gravity.  
 54.  $\mathcal{H}$  is a quantum cosmology.  
 55.  $\mathcal{H}$  is a quantum mechanics.  
 56.  $\mathcal{H}$  is a quantum electrodynamics.  
 57.  $\mathcal{H}$  is a quantum chromodynamics.  
 58.  $\mathcal{H}$  is a quantum field theory.  
 59.  $\mathcal{H}$  is a quantum gravity.  
 60.  $\mathcal{H}$  is a quantum cosmology.  
 61.  $\mathcal{H}$  is a quantum mechanics.  
 62.  $\mathcal{H}$  is a quantum electrodynamics.  
 63.  $\mathcal{H}$  is a quantum chromodynamics.  
 64.  $\mathcal{H}$  is a quantum field theory.  
 65.  $\mathcal{H}$  is a quantum gravity.  
 66.  $\mathcal{H}$  is a quantum cosmology.  
 67.  $\mathcal{H}$  is a quantum mechanics.  
 68.  $\mathcal{H}$  is a quantum electrodynamics.  
 69.  $\mathcal{H}$  is a quantum chromodynamics.  
 70.  $\mathcal{H}$  is a quantum field theory.  
 71.  $\mathcal{H}$  is a quantum gravity.  
 72.  $\mathcal{H}$  is a quantum cosmology.  
 73.  $\mathcal{H}$  is a quantum mechanics.  
 74.  $\mathcal{H}$  is a quantum electrodynamics.  
 75.  $\mathcal{H}$  is a quantum chromodynamics.  
 76.  $\mathcal{H}$  is a quantum field theory.  
 77.  $\mathcal{H}$  is a quantum gravity.  
 78.  $\mathcal{H}$  is a quantum cosmology.  
 79.  $\mathcal{H}$  is a quantum mechanics.  
 80.  $\mathcal{H}$  is a quantum electrodynamics.  
 81.  $\mathcal{H}$  is a quantum chromodynamics.  
 82.  $\mathcal{H}$  is a quantum field theory.  
 83.  $\mathcal{H}$  is a quantum gravity.  
 84.  $\mathcal{H}$  is a quantum cosmology.  
 85.  $\mathcal{H}$  is a quantum mechanics.  
 86.  $\mathcal{H}$  is a quantum electrodynamics.  
 87.  $\mathcal{H}$  is a quantum chromodynamics.  
 88.  $\mathcal{H}$  is a quantum field theory.  
 89.  $\mathcal{H}$  is a quantum gravity.  
 90.  $\mathcal{H}$  is a quantum cosmology.  
 91.  $\mathcal{H}$  is a quantum mechanics.  
 92.  $\mathcal{H}$  is a quantum electrodynamics.  
 93.  $\mathcal{H}$  is a quantum chromodynamics.  
 94.  $\mathcal{H}$  is a quantum field theory.  
 95.  $\mathcal{H}$  is a quantum gravity.  
 96.  $\mathcal{H}$  is a quantum cosmology.  
 97.  $\mathcal{H}$  is a quantum mechanics.  
 98.  $\mathcal{H}$  is a quantum electrodynamics.  
 99.  $\mathcal{H}$  is a quantum chromodynamics.  
 100.  $\mathcal{H}$  is a quantum field theory.

420 Rec'd PCT/PTO 29 NOV 1999

## DESCRIPTION

Audio Reproducing Apparatus

Technical Field

5 The present invention relates to an audio reproducing apparatus having a reproducing function for audio signals of multiple channels.

Background Art

10 Audio signals corresponding to a picture such as a movie are recorded on multiple channels so that the recorded audio signals are reproduced from speakers disposed at a left front position, a right front position, a center front position, a left back position, and a right back position of the listener or from speakers disposed at a left position and a right position of the listener. With these speakers, the position of a sound source in a picture matches the position of a real sound image. Thus, a sound field with a naturally spacial impression is accomplished.

15 However, when the listener listens to such sound with headsets, the sound image is localized in his or her head. Thus, the direction of the picture does not match the localized position of the sound image. Consequently, an unnatural sound image is localized. In addition, the audio signals of individual channels cannot be reproduced in such a manner that the localized positions thereof are separated. This problem also takes place when the

20

25

listener listens to only sounds of multiple channels  
such as musical sounds. In this case, unlike with  
sounds reproduced with speakers, the listener hears  
sounds from his or her head. Thus, since the localized  
5 positions of sound images are not separated, a sound  
field is very unnaturally reproduced.

An object of the present invention is to  
solve unnaturalness in sounds reproduced with headsets,  
in particularly, to localize a sound image at a  
10 predetermined position.

#### Disclosure of the Invention

The present invention is an audio reproducing  
apparatus for controlling transfer functions of audio  
signals of a predetermined number of channels supplied  
15 to speakers or headsets and reproducing the audio  
signals of the predetermined number of channels in  
stereo with the speakers or headsets, the apparatus  
comprising:

a distributing circuit for distributing audio  
20 signals of a predetermined number of channels to audio  
signals of a predetermined number of channels;

a first signal processing circuit for  
processing audio signals that are output from said  
distributing circuit in parallel, reproducing the  
25 resultant signals with a plurality of speakers, and  
localizing sound images of the individual audio signals  
at predetermined positions; and

a second signal processing circuit for  
inputting audio signals that are output to the  
plurality of speakers and performing signal processes  
equivalent to the transfer functions from the

5 individual speakers to both the ears of the listener,

wherein output signals of said second signal  
processing circuit are reproduced with the headsets.

Thus, a stereo sound field of speakers is  
reproduced with headsets. The sound images of the  
signals distributed to the stereo sound field are  
localized.

#### Brief Description of Drawings

Fig. 1 is a block diagram showing the  
structure of a first embodiment of the present  
invention;

Fig. 2 is a schematic diagram showing the  
structure of a circuit according to the first  
embodiment of the present invention;

Fig. 3 is a schematic diagram showing  
characteristics for explaining the present invention;

Fig. 4 is a plan view for explaining the  
present invention;

Fig. 5 is a schematic diagram showing the  
structure of a circuit according to the first  
embodiment of the present invention;

Figs. 6A and 6B are schematic diagrams  
showing the structures of circuits according to the

first embodiment of the present invention;

Fig. 7 is a plan view for explaining the present invention;

5 Fig. 8 is a schematic diagram showing the structure of a circuit according to the first embodiment of the present invention;

Fig. 9 is a schematic diagram showing the structure of a circuit according to the first embodiment of the present invention;

10 Fig. 10 is a schematic diagram showing the structure of a circuit according to the first embodiment of the present invention;

15 Fig. 11 is a block diagram showing the structure of a second embodiment of the present invention;

Fig. 12 is a block diagram showing the structure of a circuit according to a third embodiment of the present invention;

20 Fig. 13 is a schematic diagram showing the structure of a circuit according to the third embodiment of the present invention;

Fig. 14 is a plan view for explaining the present invention;

25 Fig. 15 is a block diagram showing the structure of a fourth embodiment of the present invention;

Fig. 16 is a schematic diagram showing the

structure of a circuit according to the fourth embodiment of the present invention;

Fig. 17 is a graph for explaining characteristics of the present invention;

5 Fig. 18 is a graph for explaining characteristics of the present invention; and

Fig. 19 is a schematic diagram showing the structure of a circuit according to the fourth embodiment of the present invention.

10 Best Modes for Carrying out the Invention

In Fig. 1, reference numeral 10 is an audio reproducing apparatus according to a first embodiment of the present invention. In Fig. 1, letters SLF, SRF, SLB, and SRB are audio signals of four channels. When  
15 the signals SLF, SRF, SLB, and SRB are supplied to speakers disposed at a left front position, a right front position, a left back position, and a right back position of the listener, a sound field of the audio signals of four channels is accomplished. In Fig. 1,  
20 letter SFF is an audio signal as the fifth channel. The signal SFF adds a new sound image to the sound field generated by the signals SLF to SRB.

The audio signals SLF to SFF are supplied to A/D converter circuits 21 to 25 through input terminals  
25 11 to 15, respectively. The A/D converter circuits 21 to 25 convert the audio signals SLF to SFF into respective digital audio signals. The digital audio

signals SLF to SFF are supplied to a distributing circuit 3.

The distributing circuit 3 is structured as shown in Fig. 2. In other words, the distributing circuit 3 shown in Fig. 2 outputs the signals SLF and SRF to the next staged circuit through adding circuits 31 and 32, respectively. In contrast, the distributing circuit 3 directly outputs the signals SLB and SRB to the next staged circuit. The signal SFF is supplied to the adding circuits 31 and 32 through signal processing circuits 35 and 36, respectively. In this example, the signal processing circuits 35 and 36 are for example variable attenuator circuits. Thus, the signal SFF is distributed with a ratio determined by the variable attenuator circuits 35 and 36 and mixed with the signals SLF and SRF, respectively.

The signals SLF and SRF to which the signal SFF has been distributed and the signals SLB and SRB are supplied to a first digital processing circuit 4. The first digital processing circuit 4 is composed of for example a DSP. The detail of the digital processing circuit 4 will be described later. In brief, the digital processing circuit 4 converts the audio signals SLF to SRB into audio signals SLS and SRS of which sound images of audio signals of four channels are localized with two speakers.

In other words, the digital processing



circuit 4 converts the signals SLF to SRB into the  
signal SLS and SRS in such a manner that when the  
signals SLS and SRS are supplied to speakers disposed  
at a left front position and a right front position of  
the listener, a sound field of which the signals SLF,  
SRF, SLB, and SRB are supplied to speakers disposed at  
a left front position, a right front position, a left  
back position, and a right back position of the  
listener is accomplished (at this point, although the  
audio signals SLF to SRB are digital signals, they are  
treated as analog signals for easy understanding).

The signals SLS and SRS that are output from  
the digital processing circuit 4 are supplied to a  
second digital processing circuit 5. The digital  
processing circuit 5 is composed of for example a DSP.  
The digital processing circuit 5 converts the audio  
signals SLS and SRS into audio signals SL and SR of  
which sound images are localized outside the head of  
the listener with headsets. In other words, the  
digital processing circuit 5 converts the signals SLS  
and SRS into the signals SL and SR in such a manner  
that when the signals SL and SR are supplied to the  
headsets, a sound field of which the signals SLS and  
SRS are supplied to speakers disposed at a left front  
position and a right front position of the listener is  
accomplished.

The audio signals SL and SR are supplied to

D/A converter circuits 6L and 6R, respectively. The D/A converter circuits 6L and 6R convert the digital audio signals SL and SR into analog audio signals SL and SR, respectively. The resultant audio signals SL and SR are supplied to left and right acoustic units (signal - acoustic converting devices) 8L and 8R on the left and right of the headsets 8 through headset amplifiers 7L and 7R, respectively.

In such a structure, the audio signals SL and SR supplied to the headsets 8 are signals of which sound images of the audio signals SLS and SRS reproduced with speakers are localized with the headsets 8. The audio signals SLS and SRS are signals of which the audio signals SLF to SRB of fourth channels are converted so that sound images of four channels are localized with two speakers.

Thus, with the headsets 8, a sound field of which the audio signals SLF to SRB of four channels are supplied to four speakers can be accomplished.

At this point, since the distributing circuit 3 distributes the signal SFF to the signals SLF and SRF, as shown in Fig. 3, a sound image SIFF of the signal SFF is localized in front of a listener M. When the ratio of the signal SFF distributed to the signal SLF and the ratio of the signal SFF distributed to the signal SRF are complementarily varied, the sound image SIFF of the signal SFF moves to the left and to the

right between speakers VSL and VSR virtually disposed at a left front position and a right front position of the listener M corresponding to the distributed ratios. In other words, the sound image SIFF of the signal SFF can be localized at a left front position and a right front position as well as at a center front position of the listener M.

Alternatively, when the ratio of the signal SFF distributed to the signal SLF and the ratio of the signal SFF distributed to the signal SRF are varied in the same direction, the level of the sound image SIFF of the signal SFF can be varied without need to vary the localized position.

When the signal processing circuits 31 and 32 are phase shifter circuits that cause the phases of the signals SFF and SFF distributed to the signals SLF and SRF to differ from each other, the sound image SIFF of the signal SFF can be moved and localized outside the virtual speakers VSL and VSR corresponding to the phase difference of the signals SFF and SFF.

Next, a process for converting the number of channels of a sound field of speakers will be described. The process is performed by the digital processing circuit 4. In this example, the digital processing circuit 4 is composed of a discrete circuit.

Now, as shown in Fig. 4, sound sources SSL and SSR are disposed at a left front position and a

right front position of a listener M. A sound source  
SSX is equivalently reproduced at any position outside  
the head of the listener M with the sound sources SSL  
and SSR. In this example, the sound sources SSL and  
5 SSR are expressed by the following formulas (1) and  
(2).

$$SSL = (HXL \times HRR - HXR \times HRL) / (HLL \times HRR - \\ HLR \times HRL) \times SSX \quad \dots (1)$$

$$SSR = (HXR \times HLL - HXL \times HLR) / (HLL \times HRR - \\ 10 HLR \times HRL) \times SSX \quad \dots (2)$$

where HLL is the transfer function from the sound  
source SSL to the left ear of the listener M; HLR is  
the transfer function from the sound source SSR to the  
right ear of the listener M; HRL is the transfer  
15 function from the sound source SSR to the left ear of  
the listener M; HRR is the transfer function from the  
sound source SSR to the right ear of the listener M;  
HXL is the transfer function from the sound source SSX  
to the left ear of the listener M; and HXR is the  
20 transfer function from the sound source SSX to the left  
ear of the listener M.

Thus, when an input audio signal SX  
corresponding to the sound source SSX is supplied to a  
speaker disposed at the position of the sound source  
25 SSL through a filter that accomplishes the transfer  
function portion of formula (1) and the signal SX is  
supplied to a speaker disposed at the position of the

sound source SSR through a filter that accomplishes the transfer function portion of formula (2), the sound source of the audio signal SX can be localized at the position of the sound source SSX.

5           As shown in Fig. 5, the digital processing circuit 4 is composed of digital filters 41L to 44L and 41R to 44R and adding circuits 45L and 45R. In this example, as shown in Fig. 6A, each of the digital filters is of FIR type composed of delaying circuits, 10           coefficient circuits, and adding circuits. Alternatively, as shown in Fig. 6B, the filters 51L and 41R may share delaying circuits.

          The audio signals SLF to SRB that are output from the distributing circuit 3 are supplied to the 15           adding circuit 45L through the filters 41L to 44L. In addition, the audio signals SLF to SRB are supplied to the adding circuit 45R through the digital filters 41L to 44R.

          At this point, the transfer functions of the 20           digital filters 41L to 44L and 41R to 44R are set to predetermined values as described above. Impulse responses of which the transfer function portions of formulas (1) and (2) are converted on the time axis are superimposed to the audio signals SLF to SRB.

25           Thus, the adding circuit 45L outputs the audio signal SLS. The adding circuit 45R outputs the audio signal SRS. In other words, the adding circuits

45L and 45R output the audio signals SLS and SRS that allow a sound field of which the audio signals SLF to SRB of four channels are reproduced with four speakers to be accomplished with two speakers.

5           Next, a process for converting audio signals reproduced with speakers into signals SL and SR reproduced with the headsets 8 will be described. This process is performed by the digital processing circuit 5. In this example, the digital processing circuit 5 is composed of a discrete circuit.

10           As shown in Fig. 7, when a sound source SSM is disposed in front of a listener M, assuming that HML is the transfer function from the sound source SSM to the left ear of the listener M and HMR is the transfer function from the sound source SSM to the right ear of the listener M, it is necessary to cause the digital processing circuit 5 to accomplish the transfer functions HML and HMR.

15           As shown in Fig. 8, the digital processing circuit 5 is composed of digital filters 51L, 52L, 51R, and 52R and adding circuits 55L and 55R. As with the digital filters 41L to 44R shown in Fig. 5, the digital filters 51L to 52R can be structured as shown in Fig. 6.

20           As shown in Fig. 8, the digital processing circuit 5 is composed of digital filters 51L, 52L, 51R, and 52R and adding circuits 55L and 55R. As with the digital filters 41L to 44R shown in Fig. 5, the digital filters 51L to 52R can be structured as shown in Fig. 6.

25           Audio signals SLS and SRS are supplied from the digital processing circuit 4 to the adding circuit 55L through the digital filters 51L and 52L. In

addition, the audio signals SLS and SRS are supplied from the digital processing circuits 4 to the adding circuit 55R through the digital filters 51R and 52R. At this point, the transfer functions of the digital filters 51L to 52R are set to predetermined values. Impulse responses of which the transfer functions are converted on the time axis are superimposed to the audio signals SLS and SRS.

Thus, the adding circuit 55L outputs the audio signal SL. The adding circuit 55R outputs the audio signal SR. In other words, the adding circuits 55L and 55R output the audio signals SL and SR that allow a sound field of which the audio signals SLS and SRS are reproduced with speakers to be accomplished with the headsets 5.

In such a manner, the digital processing circuit 4 converts the audio signals SLF to SRB of four channels to the audio signals SLS and SRS that allow a sound field of four speakers to be accomplished with two speakers. The digital processing circuit 5 converts the signals SLS and SRS into the audio signals that allow a sound field of speakers to be accomplished with the headsets 8. Thus, when the audio signals SL and SR are supplied to the headsets 8, a sound field of four speakers is accomplished.

Thus, the above-described audio reproducing apparatus 10 can reproduce a sound field of four

channels for speakers with the headsets 8. Generally,  
since the amount of the signal process of the digital  
processing circuit 4 that decreases the number of  
channels is smaller than the amount of the signal  
process of the digital processing circuit 5 that  
reproduces a sound field of speakers with headsets, the  
circuit scale of the above-described audio reproducing  
apparatus 10 can be reduced in comparison with the case  
that one digital processing circuit performs all  
processes. Thus, the cost of the audio reproducing  
apparatus 10 can be reduced.

In addition, the sound image SIFF of the  
audio signal SFF can be localized at any position in  
front of the listener M by the distributing circuit 3.

Fig. 9 shows the structure of the  
distributing circuit 3 that allows an audio image of  
the audio signal SFF as the fifth channel to be  
localized at any position of the sound field of the  
audio signals SLF to SRB.

In other words, digital audio signals SFF to  
SRB are supplied from A/D converter circuits 21 to 24  
to the next staged digital processing circuit 4 through  
adding circuits 31 to 34, respectively. At this point,  
a digital audio signal SFF is supplied from an A/D  
converter circuit 25 to the adding circuits 31 to 34  
through signal processing circuits 35 to 38,  
respectively. In this example, the signal processing



circuits 35 to 38 are for example variable attenuator circuits. Thus, the signal SFF is distributed and mixed with the signals SLF to SRB with ratios determined by the variable attenuator circuits 35 to 38, respectively.

The structure of the digital processing circuit 4 and the downstream circuits thereof is the same as the structure of the audio reproducing apparatus 10 shown in Fig. 1. Thus, with the headsets 8, a sound field of which audio signals SLF to SRB of four channels are supplied to four speakers can be accomplished.

At this point, when the ratio of the signal SFF distributed to the signals SLF and SLB of left channels and the ratio of the signal SFF distributed to the signals SRF and SRB on right channels are complementarily varied by the distributing circuit 3, the sound image of the signal SFF is moved on the left and right in the sound field of the signals SLF to SRB. When the ratio of the signal SFF distributed to the signals SLF and SRF of front channels and the ratio of the signal SFF distributed to the signals SLB and SRB of back channels are complementarily varied, the sound image of the signal SFF is moved to the front and back in the sound field of the signals SLF to SRB.

Thus, the sound image of the signal SFF can be localized at any position of the sound field of the

signals SLF to SRB.

When the signal processing circuits 31 to 34 are phase shifter circuits that cause the phases of the signals SFF and SFF distributed to the signals SRL and SRB to differ from each other, a sound image of the signal SFF can be moved and localized outside the virtual speakers corresponding to the phase difference. In addition, with the signal SFF and a signal that represents the localized position thereof, the signal processing circuits 31 to 34 can be controlled.

Fig. 10 shows the structure of the distributing circuit 3 that can localize sound images of the audio signals SLF to SRB to any positions of the sound field.

In other words, digital audio signals SLF to SRB are supplied from A/D converter circuits 21 to 24 to the next staged digital processing circuit 4 through signal processing circuits 351 to 354 and adding circuits 31 to 34, respectively. In addition, the signal SLF is supplied to the adding circuits 32 to 34 through the signal processing circuits 361 to 381. The signal SRF is supplied to the adding circuits 31, 33, and 34 through the signal processing circuits 362 to 382. The signal SLB is supplied to the adding circuits 31, 32, and 34 through the signal processing circuits 363 to 383. The signal SRB is supplied to the adding circuits 31 to 33 through the signal processing

circuits 364 to 384. In such a manner, signals of other channels are distributed and mixed with the signals SLF to SRB.

The structure of the digital processing circuit 4 and the downstream circuits thereof is the same as the structure of the audio reproducing apparatus 10 shown in Fig. 1. Thus, with the headsets 8, a sound field of which audio signals SLF to SRB of four channels are supplied to four speakers can be accomplished.

At this point, since the signals SLF to SRB that are output from the distributing circuit 3 are mixed with signals of other channels in predetermined ratios, by varying the ratios, the localized positions of the audio images of the signals SLF to SRB or the sound field thereof can be varied corresponding to the ratios. When the signal processing circuits 351 to 384 are phase shifter circuits that cause the phases of signals distributed to the signals SLF and SRF to differ from each other, the localized positions of the sound images and the sound field can be extended.

Fig. 11 shows a structure of which speakers can be used along with headsets 8. In other words, the structure of audio signal lines from input terminals 11 to 15 to headsets 8 is the same as the audio reproducing apparatus 10 shown in Fig. 1. In addition, audio signals SLS and SRS are supplied from a digital

processing circuit 4 to D/A converter circuits 60L and 60R through terminals 50L and 50R, respectively. The D/A converter circuits 60L and 60R convert the audio signals SLS and SRS into analog audio signals SLS and SRS, respectively. The analog audio signals SLS and SRS are supplied to speakers 80L and 80R through power amplifiers 70L and 70R, respectively. The speakers 80L and 80R are disposed at a left front position and a right front position of the listener.

Thus, with the headsets 8, a sound field of four speakers can be accomplished. In addition, with the two speakers 80L and 80R, a sound field of four speakers can be accomplished.

Moreover, in such a case, the circuits from the input terminals to the digital processing circuit 5 can be shared by the headsets 8 and the speakers 80L and 80R. It is not necessary to change the characteristics of the signal processing circuit 3 and the digital processing circuit 4 when the headsets 8 or the speakers 80L and 80R are used. When the digital processing circuit 4 is composed of a DSP, it is not necessary to change the processes and parameters thereof.

Fig. 12 shows the structure of which the audio reproducing apparatus 10 is connected to a signal source of digital audio signals of multiple channels. In Fig. 12, reference numeral 100 is a signal source of

digital audio signals. In this example, the signal source 100 is a DVD player. The DVD player 100 outputs for example a digital audio signal SDA of 5.1 channels according to the Dolby digital system (AC-3).

5           The digital audio signal SDA is a signal of which digital audio signals SLF, SCF, SRF, SLB, SRB, and SLOW have been encoded into serial data of one channel (as a bit stream). The digital audio signals SLF, SCF, SRF, SLB, and SRB are signals reproduced with  
10           speakers disposed at a left front position, a center front position, a right front position, a left back position, and a right back position of the listener. The signal SLOW is a low band signal of 120 Hz or less. Generally, the signal SDA is supplied to a dedicated  
15           adaptor. The adaptor decodes and converts the digital signal SDA to the original analog audio signals SLF to SLOW of six channels. The decoded analog audio signals SLF to SLOW are supplied to respective speakers. The speakers generates a sound field of these analog audio  
20           signals.

          The signal SDA is supplied from the player 100 to a decoder circuit 2 of an audio reproducing apparatus 10 through a coaxial cable 101. The decoder circuit 2 decodes or separates the signal SDA into the  
25           audio signals SLF to SLW. The audio signals SLF to SLOW are supplied to a distributing circuit 3.

          The distributing circuit 3 is structured as

shown in Fig. 13. In other words, a sound image of which the audio signal SCF of center front channel is supplied to a speaker disposed at a center front position of the listener can be reproduced with speakers disposed at a left front position and a right front position of the listener. The audio signal SLOW of low band channel is a signal at a low frequency. Thus, a sound image of the signal SLOW does not have a directivity.

In the distributing circuit 3 shown in Fig. 13, the digital audio signals SLF and SRF that are output from the decoder circuit 2 are supplied to the next staged digital processing circuit 4 through adding circuits 31 and 32. The digital audio signal SCF is supplied from the decoder circuit 2 to the adding circuits 31 and 32 through an attenuating circuit 38C. The audio signal SCF is separated into the audio signals SLF and SRF.

The digital audio signals SLB and SRB that are output from the decoder circuit 2 are supplied to the next staged digital processing circuit 4 through adding circuits 33 and 34, respectively. The digital audio signal SLOW that is output from the decoder circuit 2 is supplied to adding circuits 31 to 34 through an attenuating circuit 38W. The audio signal SLOW is distributed to the audio signals SLF to SRB. In such a manner, the signals SLF to SLOW are converted

into the audio signals SLF to SRB of four channels.

As shown in Fig. 12, the audio signals SLF to SRB are supplied to the digital processing circuit 4. The digital processing circuit 4 converts the audio signals SLF to SRB into signals SLS and SRS. The signals SLS and SRS are supplied to a digital processing circuit 5. The digital processing circuit 5 converts the signals SLS and SRS into audio signals SL and SR for headsets. Thereafter, the audio signals SL and SR are supplied to the headsets 8 through D/A converter circuits 6L and 6R and amplifiers 7L and 7R, respectively.

Thus, with the audio reproducing apparatus 10, a sound field of which audio signals SLF to SLOW of six channels are supplied to six speakers can be accomplished with the headsets 8.

In this case, the DVD player 1 and the audio reproducing apparatus 10 can be easily connected with only one cable 101. In addition, since the digital audio signal SDA reproduced by the DVD player 100 is directly supplied to the audio reproducing apparatus 10, not converted into an analog audio signal, the sound quality can be prevented from deteriorating.

In the audio reproducing apparatus 10, as with the audio reproducing apparatus shown in Fig. 11, when the audio signals SLS and SRS that are output from the digital processing circuit 4 are supplied to

speakers disposed at a left front position and a right front position of the listener through D/A converters and power amplifiers, a sound field of six speakers can be accomplished with the two speakers.

5                   In the case that a sound image is localized at any position outside the head of a listener M with sound sources SSL and SSR disposed at a left front position and a right front position of the listener M as shown in Fig. 14, when the listener M turns his or her head, transfer functions HLL, HLR, HRL, and HRR are varied. The variations of the transfer functions HLL to HRR are factors with which the listener M recognizes the position of a sound image. It is known that when the variations of the transfer functions are reproduced, the sound image can be accurately localized.

10                   However, in the above-described audio reproducing apparatus 10, the transfer functions are fixed regardless of the orientation of the head of the listener M. Thus, when audio signals for headsets are reproduced with the audio reproducing apparatus 10, the sound images thereof are localized at fixed positions regardless of the orientation of the head of the listener M.

20                   Thus, when the listener who is listening to a music of an orchestra turns his or her head, he or she feels as if the orchestra follows the orientation of



his or her head. In the case of the audio reproducing apparatus 10 shown in Fig. 12, a picture reproduced by the DVD player 100 is displayed at a so-called absolute position by a display unit regardless of the orientation of the listener M. In contrast, when the listener turns his or her head, the sound image follows his or her head. Thus, the position of the picture deviates from the position of the sound image.

Fig. 15 shows the structure of which a sound image is localized at a predetermined position regardless of the orientation of the head of a listener.

In Fig. 15, audio signal lines from a DVD player 100 to headsets 8 are the same as those shown in Fig. 12. A rotating angular velocity sensor 91 such as a voltage vibration gyro or a geomagnetism azimuth sensor is disposed in the headsets 8. An output signal of the rotating angular velocity sensor 91 is supplied to a detecting circuit 92. The detecting circuit 92 detects an angular velocity corresponding to the orientation of the head of the listener. The detected angular velocity is supplied as a detection signal S92 to an A/D converter circuit 93. The A/D converter circuit 93 converts the detection signal S92 as an analog signal into a digital signal. The digital detection signal S92 is supplied to a microcomputer 94.

The microcomputer 94 samples the detection

signal S92 at predetermined intervals and integrates the samples of the detection signal S92 so as to convert the detection signal S92 into angular data that represents the orientation of the head of the listener.

5 In addition, the microcomputer 94 generates a control signal S94 for localizing a sound image with the angular data and supplies the control signal S94 to a digital processing circuit 5. The digital processing circuit 5 controls the transfer functions of the digital filters 51L to 52R.

10 In the case that a sound source is disposed in front of the listener M, when the listener turns to the right, since the left ear of the listener approaches the sound source, the delay of the sound wave that enters the left ear becomes small and the level of the sound wave rises. In contrast, the delay of the sound wave that enters the right ear becomes large and the level of the sound wave lowers. Thus, the coefficients of the digital filters 51L to R2R are controlled corresponding to the signal S94 so that such variations of the transfer functions are accomplished.

20 Thus, when the listener M turns his or her head, the transfer functions of the digital processing circuit 5 vary corresponding to the orientation of the head. Sound images generated by acoustic units 8L and 8R are localized at fixed positions outside of the head regardless of the orientation thereof. Thus, when the

listener M who is listening to a music of an orchestra turns his or her head, he or she hears the music as if he or she turns his or her head in front of the orchestra (the orchestra is not moved). Alternatively, while the DVD player 100 is reproducing a sound and a picture, even if the listener turns his or her head, the localized position of the sound matches the position of the picture.

The digital processing circuit 45 of the audio reproducing apparatus 10 shown in Fig. 15 can be structured as follows.

In Fig. 14, when the listener M turns his or her head to the right, the left ear of the listener M approaches the sound source SL. In contrast, the right ear of the listener M goes apart from the sound source SL. Thus, the sound wave of the sound source SL reaches the left ear more earlier than the right ear. In addition, the level of the sound wave that reaches the left ear is higher than the level of the sound wave that reaches the right ear. Thus, when variations against the reference orientation (namely, the variation of the arrival time of the sound wave and the variation of the level), the transfer functions can be dynamically simulated.

In circuits 4 and 5 shown in Fig. 16, audio signals SLF and SRF are supplied from the distributing circuit 3 to adding circuits 421 and 422 through

digital filters 411L and 412R. In addition, the audio signals SLF and SRF are supplied to the adding circuits 422 and 421 through digital filters 411R and 412L. At this point, the transfer functions of the digital  
5 filters 411L to 412R are set to predetermined values in the above-described manner. Impulse responses of which the transfer function portions of formulas (1) and (2) are converted on the time axis are superimposed to the audio signals SLF and SRF. The resultant signals are  
10 extracted as audio signals SL1 and SR2 of left front channel and right front channel from the adding circuits 421 and 422, respectively.

The audio signals SL1 and SR2 are supplied to adding circuits 56L and 56R through time difference  
15 adding circuits 54L and 54R and level difference adding circuits 55L and 55R, respectively.

Audio signals SLB and SRB are supplied from the distributing circuit 3 to adding circuits 423 and 424 through digital filters 413L and 414R. In  
20 addition, the audio signals SLB and SRB are supplied to the adding circuits 424 and 423 through digital filters 413R and 414L. At this point, the transfer functions of the digital filters 413L to 414R are set to predetermined values in the above-described manner.

25 Impulse responses of which the transfer function portions of formulas (1) and (2) have been converted on the time axis are superimposed to the audio signals SLB

and SRB. The resultant signals are extracted as audio signals SL3 and SR4 of left back channel and right back channel from the adding circuits 423 and 424, respectively. The audio signals SL3 and SR4 are  
5 supplied to adding circuits 56L and 56R, respectively.

The adding circuit 56L adds the signal S1L of left front channel and the signal SL3 of left back channel and outputs the resultant signal as a signal SL of left channel. The adding circuit 56R adds the  
10 signal SR2 of right front channel and the signal SR4 of right back channel and outputs the resultant signal as a signal SR4 of right back channel. These signals SL and SR are supplied to the acoustic units 8L and 8R through the D/A converters 6L and 6R and the amplifiers  
15 7L and 7R, respectively.

Thus, when the audio signals SL and SR are supplied to the headsets 8, sound images of which audio signals SLF to SRB are supplied to four speakers can be equivalently accomplished. Thus, a sound filed of four  
20 speakers can be equivalently accomplished.

However, in this case, since the coefficients of the digital filters 411L to 414R are fixed, the localized positions of the sound images reproduced with the headsets 8 are fixed against the listener M. Thus,  
25 as was described above, when the listener M turns his or her head, the sound images are also moved corresponding to the orientation of the head of the

listener M.

To prevent such a problem, with a signal S94 that is output from a microcomputer 94, the time differences and level differences added to adding circuits 54L to 55R are controlled. In other words, the adding circuits 54L and 54R are composed of for example variable delaying circuits. The adding circuits 55L and 55R are composed of for example variable gain circuits.

In the case that a sound source is disposed in front of the listener M, when the listener M turns his or her head to the right, the time delay of the sound wave that enters the left ear of the listener M becomes small and the level thereof rises. Thus, the characteristic of the adding circuit 54L is controlled as denoted by a polygonal line B of Fig. 17. The characteristic of the adding circuit 55L is controlled as denoted by a curve C of Fig. 18. Due to the relation of the left ear and right ear of the listener M, the characteristic of the adding circuit 54R is controlled as denoted by a polygonal line A of Fig. 17. The characteristic of the adding circuit 55R is controlled as denoted by a curve D of Fig. 18. The coefficients of the digital filters 411L to 414R are fixed to values of which the listener M faces the front.

Thus, when the listener turns his or her

head, the time difference and level difference between the signals SL1 and SR2 of front channels vary as shown in Figs. 17 and 18, respectively. Thus, a sound image in front of the listener M is localized at a fixed position outside the head thereof regardless of the orientation thereof.

Although the time difference and level difference between the signals SL3 and SR4 of back channels are not processed, it is easier to localize a sound image behind the listener M than in front of the listener M. With the digital filters 413L to 414R of which impulse responses are superimposed to signals SL3 and SR4, sound images can be localized behind the head of the listener M. Experimental results show that when the time difference and level difference are processed for the signals SL3 and SR4 of back channels, sound images are inadequately localized behind the head of the listener M.

Thus, the processes for adding the time difference and level difference for the signals SL3 and SR4 of back channels can be omitted. Consequently, a sound image can be localized behind the head of the listener M without deterioration of sense of presence.

In the headsets, the variations of the coefficients of the digital filters 411L to 412R are substituted or simulated with the time difference and level difference between the audio signals SL1 and SR2.

Thus, the circuit scale of the apparatus can be remarkably reduced. In addition, the cost of the apparatus can be prevented from rising.

5 The digital processing circuit 5 may be structured as shown in Fig. 19. In other words, audio signals SLS and SRS that are output from a digital processing circuit 4 are added with a predetermined ratio by an adding circuit 58L. The resultant signal is supplied to a digital filter 51. In addition, audio signals SLS and SRS are subtracted with a predetermined ratio by a subtracting circuit 58R. The resultant signal is supplied to a digital filter 52.

10 Output signals of the digital filters 51 and 52 are subtracted with a predetermined ratio by a subtracting circuit 59. The subtracting circuit 59 outputs a digital audio signal SL. Output signals of the filters 51 and 52 are added with a predetermined ratio by an adding circuit 59R. The adding circuit 59R outputs a digital audio signal SR.

15 Thus, the amount of data processed by the digital processing circuit 5 can be reduced. Consequently, the digital processing circuit 5 can be effectively composed of a DSP.

20 In addition, audio signals can be wirelessly supplied to the headsets 8.

25 Industrial Utilization

A sound field of which audio signals of



multiple channels are supplied to relevant speakers can be equivalently accomplished by headsets. The circuit scale of the apparatus can be reduced in comparison with the structure of which all processes are  
5 separately performed. In addition, the cost of the apparatus can be reduced. Moreover, the localized positions of sound images can be changed.

An audio reproducing apparatus can be easily connected to a signal source of a digital audio signal such as a DVD player with only one cable. In addition,  
10 the digital audio signal of the signal source can be directly supplied to the audio reproducing apparatus. Thus, the sound quality of the digital audio signal can be suppressed from deteriorating. In addition, even if  
15 the listener turns his or her head, the localized position of a sound image generated by the headsets can be matched with the position of a picture.

# CLAIMS

1. An audio reproducing apparatus, comprising:  
a first signal processing circuit for  
processing input audio signals of N channels;  
5 generating and processing means for inputting  
left channel directional components and right channel  
directional components of the output audio signals of  
said first signal processing circuit and generating  
signals that represent the positions of sound images  
10 corresponding to the left channel directional  
components and right channel directional components as  
sound image components;  
a second signal processing circuit for  
processing audio signals that are output from said  
15 generating and processing means on each channel so as  
to equivalently accomplish a sound field of M (where  $M \leq N$ ) electrical - acoustic converting units;  
first signal processing means for supplying  
output audio signals of said second signal processing  
20 circuit to the M electric - acoustic converting units,  
causing the M electric - acoustic converting units to  
reproduce the output audio signals, and localizing the  
sound images of the audio signals at any positions of  
the listener;  
25 audio signals that are output to the M  
electric - acoustic converting units; and  
second signal processing means for inputting

the audio signals and equivalently processing the audio signals corresponding to transfer functions from the M electric - acoustic converting units to both the ears of the listener,

5                    wherein the output signals of said second signal processing means are reproduced with the M electric - acoustic converting units.

2.                  An audio reproducing apparatus, comprising:

                  a first signal processing circuit for  
10                  processing input audio signals of N channels;

                  a variably attenuating circuit for inputting  
left channel directional components and right channel directional components of the output audio signals of said first signal processing circuit, varying the  
15                  amounts of sound images corresponding to the left channel directional components and right channel directional components as sound image components, and outputting signals that represent the positions of the sound images;

20                  a second signal processing circuit for processing audio signals that are output from said variably attenuating circuit on each channel so as to equivalently accomplish a sound field of M (where  $M \leq N$ ) electrical - acoustic converting units;

25                  first signal processing means for supplying output audio signals of said second signal processing circuit to the M electric - acoustic converting units,

causing the M electric - acoustic converting units to reproduce the output audio signals, and localizing sound images of the audio signals at any positions of the listener;

5                audio signals that are output to the M electric - acoustic converting units; and

              second signal processing means for inputting the audio signals and equivalently processing the audio signals corresponding to transfer functions from the M  
10 electric - acoustic converting units to both the ears of the listener,

              wherein the output signals of said second signal processing means are reproduced with the M electric - acoustic converting units.

15            3.            An audio reproducing apparatus, comprising:  
              a first signal processing circuit for processing input audio signals of N channels;

              a variable phase circuit for inputting left channel directional components and right channel  
20 directional components of the output audio signals of said first signal processing circuit, varying the phases of the audio signals corresponding to the left channel directional components and right channel directional components as sound image components, and  
25 outputting signals that represent the positions of the sound images;

              a second signal processing circuit for

processing audio signals that are output from said variable phase circuit on each channel so as to equivalently accomplish a sound field of M (where  $M \leq N$ ) electrical - acoustic converting units;

5                   first signal processing means for supplying output audio signals of said second signal processing circuit to the M electric - acoustic converting units, causing the M electric - acoustic converting units to reproduce the output audio signals, and localizing  
10                   sound images of the audio signals at any positions of the listener;

                  audio signals that are output to the M electric - acoustic converting units; and

                  second signal processing means for inputting  
15                   the audio signals and equivalently processing the audio signals corresponding to transfer functions from the M electric - acoustic converting units to both the ears of the listener,

                  wherein the output signals of said second  
20                   signal processing means are reproduced with the M electric - acoustic converting units.

4.                An audio reproducing apparatus, comprising:

                  a first signal processing circuit for processing input audio signals of N channels;

25                   first generating and processing means for inputting left channel directional components and right channel directional components of the output audio

signals of said first signal processing circuit and  
generating signals that represent the positions of  
sound images corresponding to the left channel  
directional components and right channel directional  
components as sound image components;

second generating and processing means for  
generating audio signals corresponding to synchronous  
components of output audio signals of said first signal  
processing circuit;

a second signal processing circuit for  
processing audio signals that are output from said  
second generating and processing means on each channel  
so as to equivalently accomplish a sound field of M  
(where  $M \leq N$ ) electrical - acoustic converting units;

first signal processing means for supplying  
output audio signals of said second signal processing  
circuit to the M electric - acoustic converting units,  
causing the M electric - acoustic converting units to  
reproduce the output audio signals, and localizing  
sound images of the audio signals at any positions of  
the listener;

audio signals that are output to the M  
electric - acoustic converting units; and

second signal processing means for inputting  
the audio signals and equivalently processing the audio  
signals corresponding to transfer functions from the M  
electric - acoustic converting units to both the ears

of the listener,

wherein the output signals of said second signal processing means are reproduced with the M electric - acoustic converting units.

5 5. An audio reproducing apparatus, comprising:

a first signal processing circuit for processing input audio signals of N channels;

10 a variably attenuating circuit for inputting left channel directional components and right channel directional components of the output audio signals of said first signal processing circuit, varying the amounts of attenuation corresponding to the left channel directional components and right channel directional components as sound image components, and  
15 outputting signals that represent the positions of the sound images;

generating and processing means for generating audio signals corresponding to synchronous components of output signals of said first signal  
20 processing circuit;

a second signal processing circuit for processing audio signals that are output from said generating and processing means on each channel so as to equivalently accomplish a sound field of M (where  $M \leq N$ ) electrical - acoustic converting units;  
25

first signal processing means for supplying output audio signals of said second signal processing

circuit to the M electric - acoustic converting units,  
causing the M electric - acoustic converting units to  
reproduce the output audio signals, and localizing  
sound images of the audio signals at any positions of  
the listener;

audio signals that are output to the M  
electric - acoustic converting units; and

second signal processing means for inputting  
the audio signals and equivalently processing the audio  
signals corresponding to transfer functions from the M  
electric - acoustic converting units to both the ears  
of the listener,

wherein the output signals of said second  
signal processing means are reproduced with the M  
electric - acoustic converting units.

6. An audio reproducing apparatus, comprising:

a first signal processing circuit for  
processing input audio signals of N channels;

a variable phase circuit for inputting  
left channel directional components and right channel  
directional components of the output audio signals of  
said first signal processing circuit, varying the  
phases of the audio signals corresponding to the left  
channel directional components and right channel  
directional components as sound image components, and  
outputting signals that represent the positions of the  
sound images;



generating and processing means for  
generating audio signals corresponding to synchronous  
components of output signals of said first signal  
processing circuit;

5           a second signal processing circuit for  
processing audio signals that are output from said  
generating and processing means on each channel so as  
to equivalently accomplish a sound field of M (where  $M \leq N$ ) electrical - acoustic converting units;

10           first signal processing means for supplying  
output audio signals of said second signal processing  
circuit to the M electric - acoustic converting units,  
causing the M electric - acoustic converting units to  
reproduce the output audio signals, and localizing  
15           sound images of the audio signals at any positions of  
the listener;

            audio signals that are output to the M  
electric - acoustic converting units; and

20           second signal processing means for inputting  
the audio signals and equivalently processing the audio  
signals corresponding to transfer functions from the M  
electric - acoustic converting units to both the ears  
of the listener,

25           wherein the output signals of said second  
signal processing means are reproduced with the M  
electric - acoustic converting units.

7.           The audio reproducing apparatus as set forth

in claim 1, 2, 3, 4, 5, or 6,

wherein the input signals are signals of  
which audio signals of P channels (where  $P \geq N$ ) have  
been converted into audio signals of Q channels (where  
5  $P > Q$ ), and

wherein the apparatus further comprises:

a converting circuit for converting the input  
signals of Q channels into the audio signals of N  
channels (where  $P \geq N > Q$ ).

10 8. The audio reproducing apparatus as set  
forth in claim 1, 2, 3, 4, 5, or 6, further comprising:

output means for supplying output signals of  
said first signal processing circuit to the outside of  
the apparatus;

15 detecting means for detecting the motion of  
the head of the listener;


controlling means for controlling said second  
signal processing means corresponding to an output  
signal of said detecting means; and

20 means for wirelessly supplying audio signals  
to the M electric - acoustic converting units.


## ABSTRACT

A distributing circuit distributes audio signals of a predetermined number of channels to audio signals of a predetermined number of channels. A first  
5 signal processing circuit processes audio signals that are output from the distributing circuit in parallel, reproduces the resultant signals with a plurality of speakers, and localizes sound images of the individual audio signals at predetermined positions. A second  
10 signal processing circuit inputs audio signals that are output to the plurality of speakers and performs signal processes equivalent to the transfer functions from the individual speakers to both the ears of the listener. The output signals of the second signal processing  
15 circuit are reproduced with the headsets.

Fig. 1

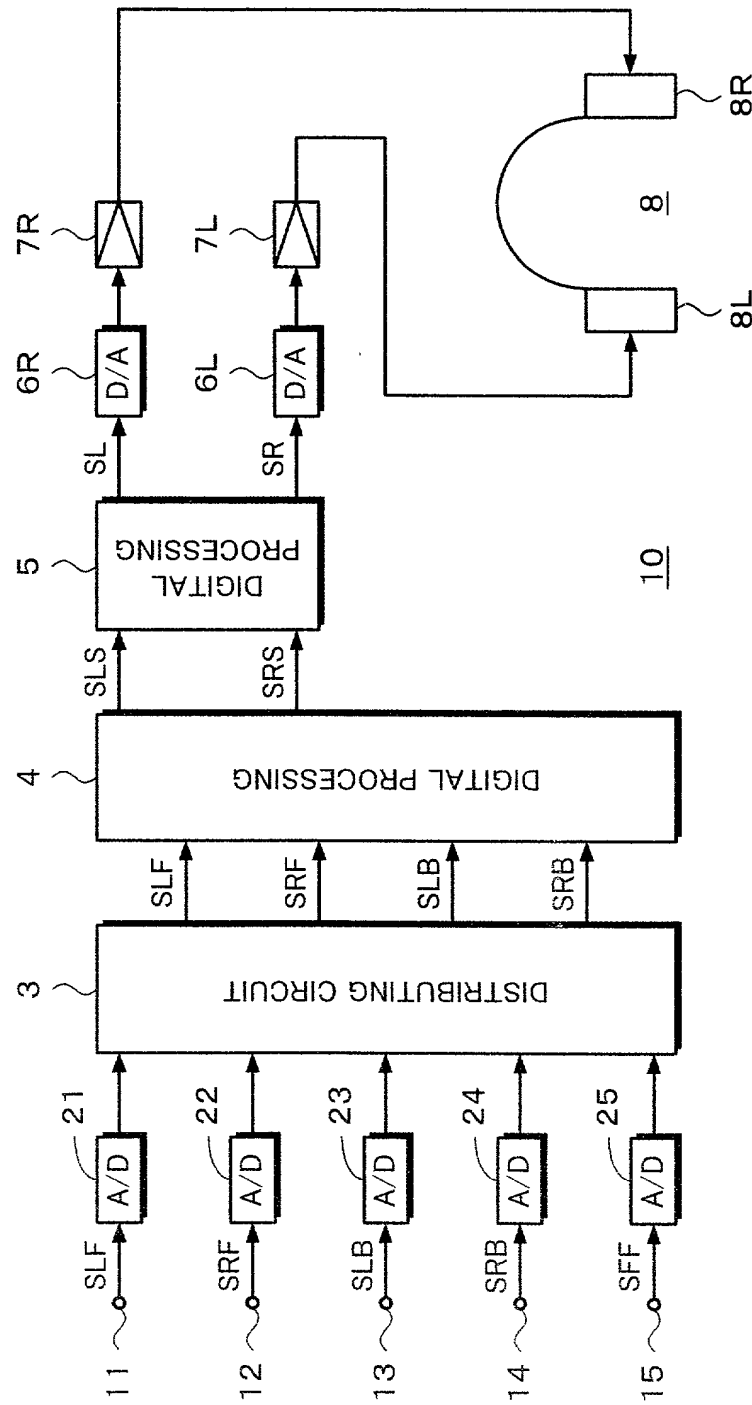

*Fig. 2*

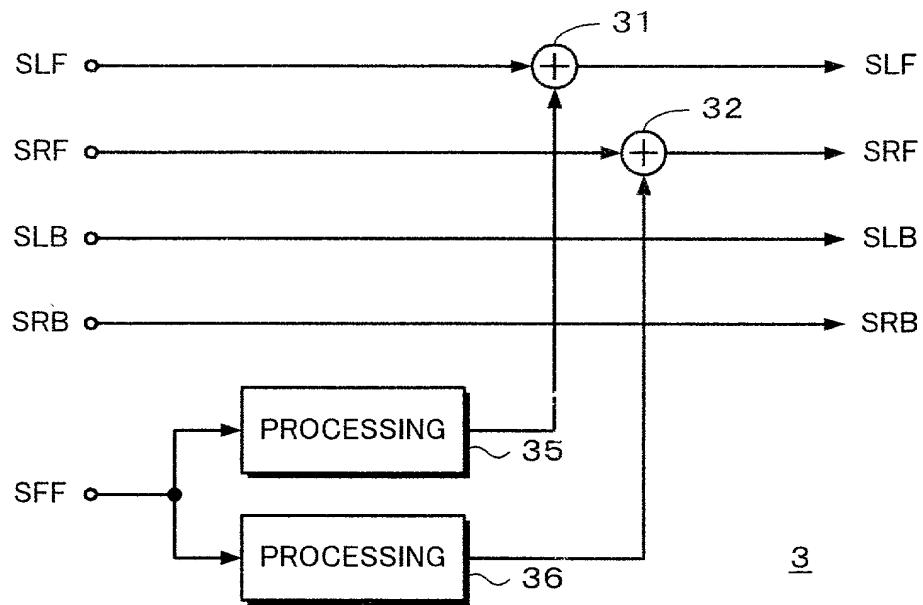

*Fig. 3*

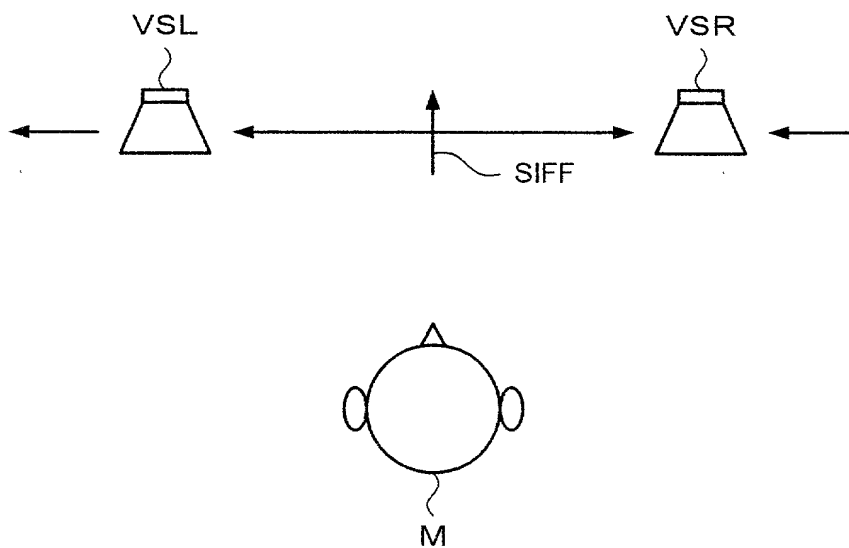


Fig. 4


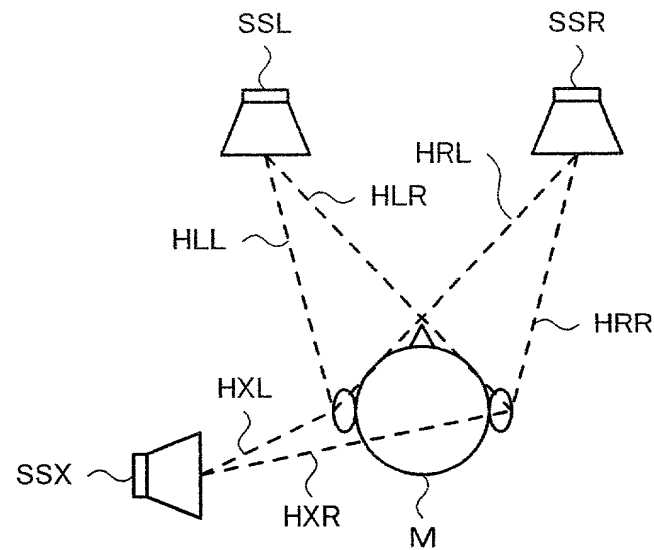


Fig. 5

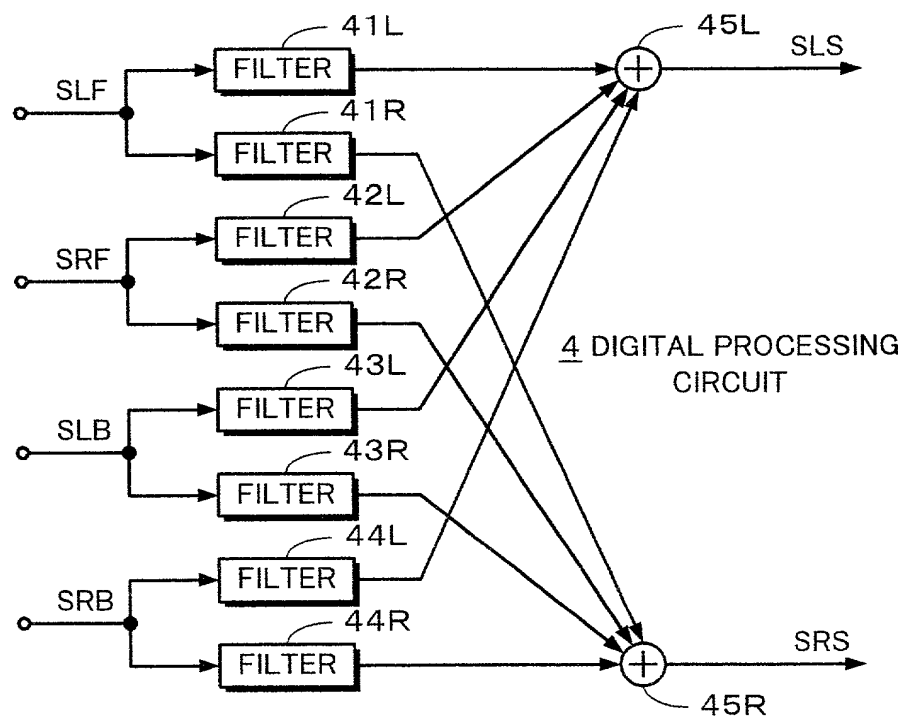

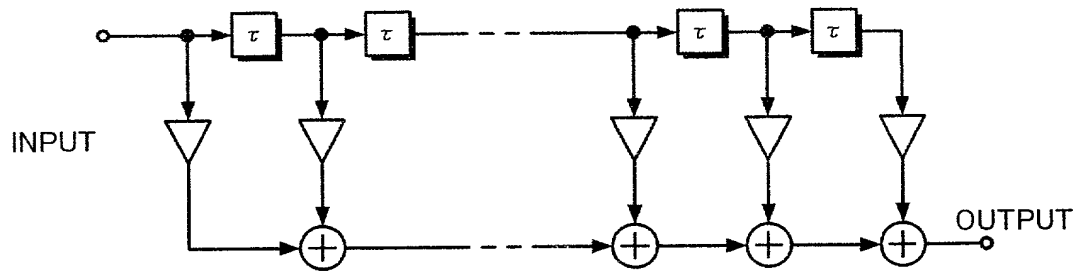
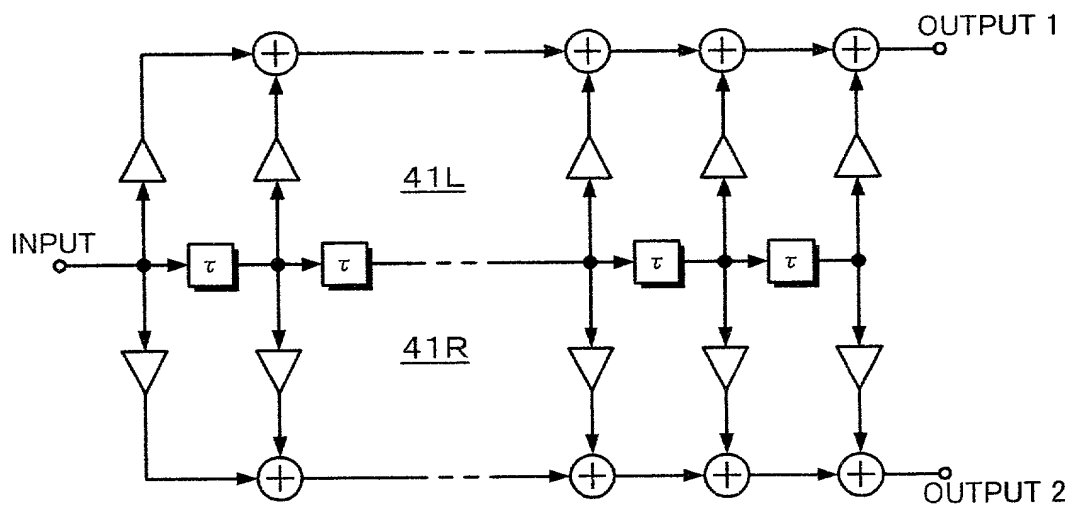
*Fig. 6A*41L ~ 41R*Fig. 6B*

Fig. 7


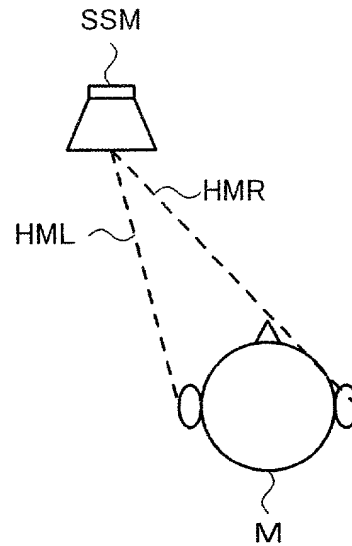


Fig. 8

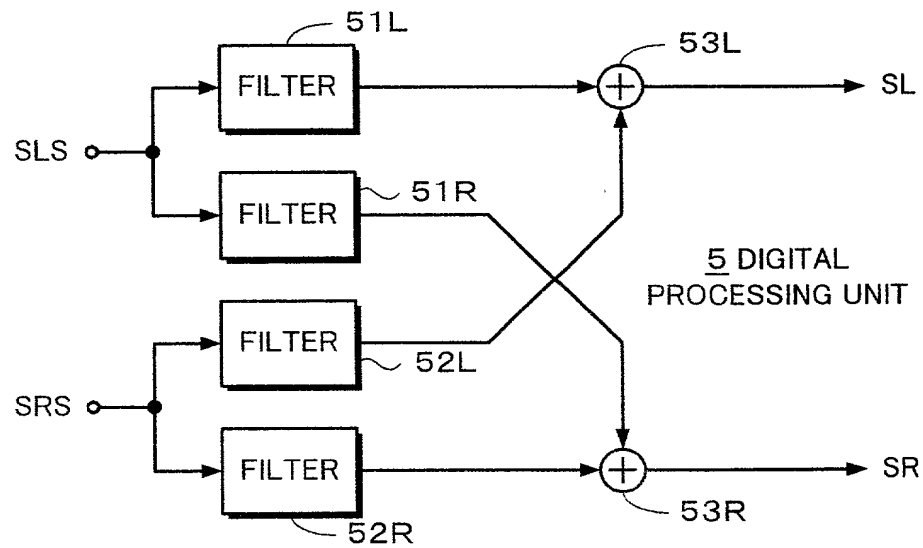



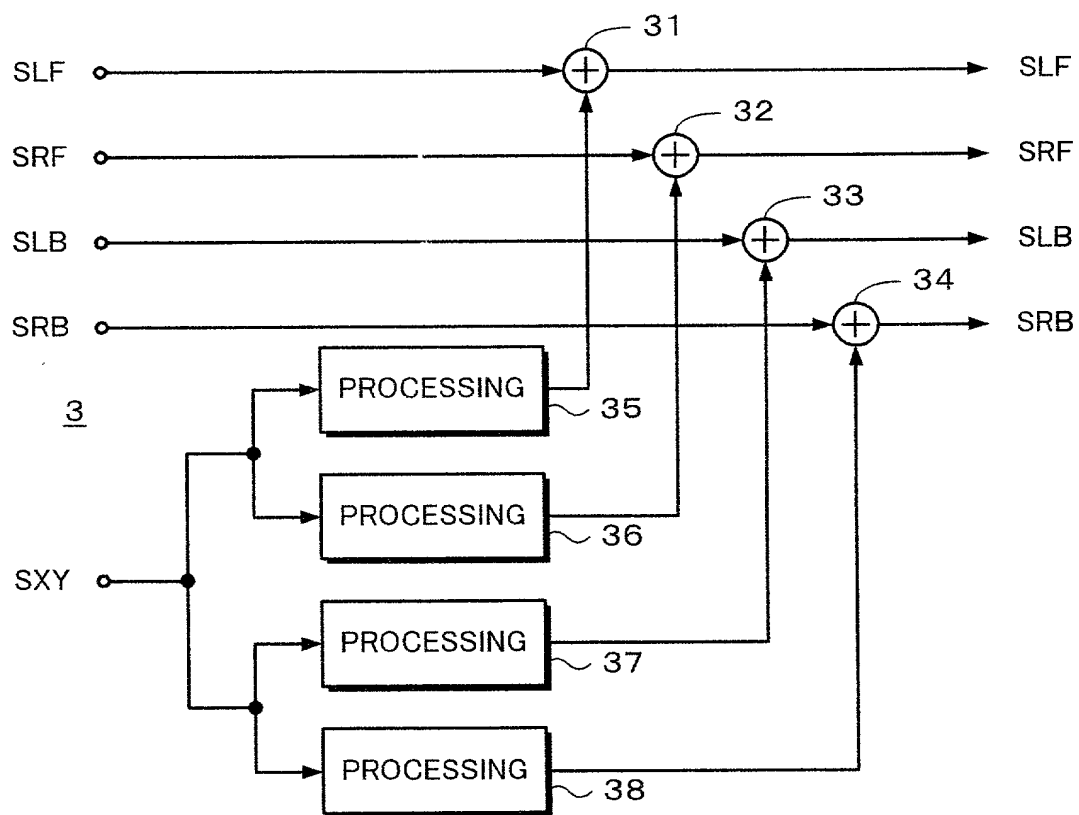
*Fig. 9*

Fig. 10

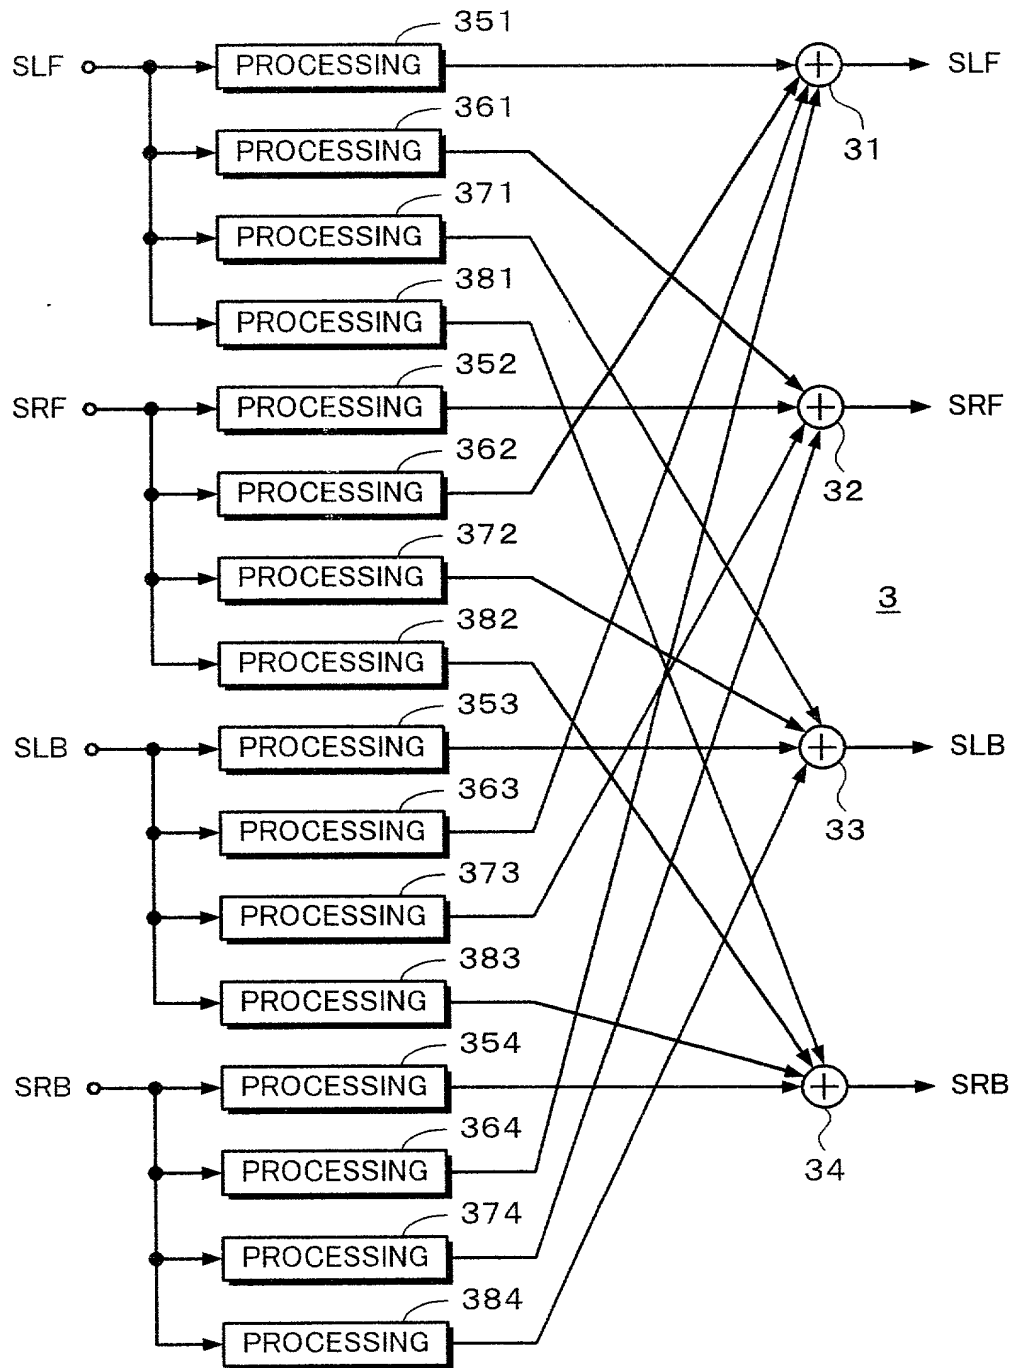


Fig. 11

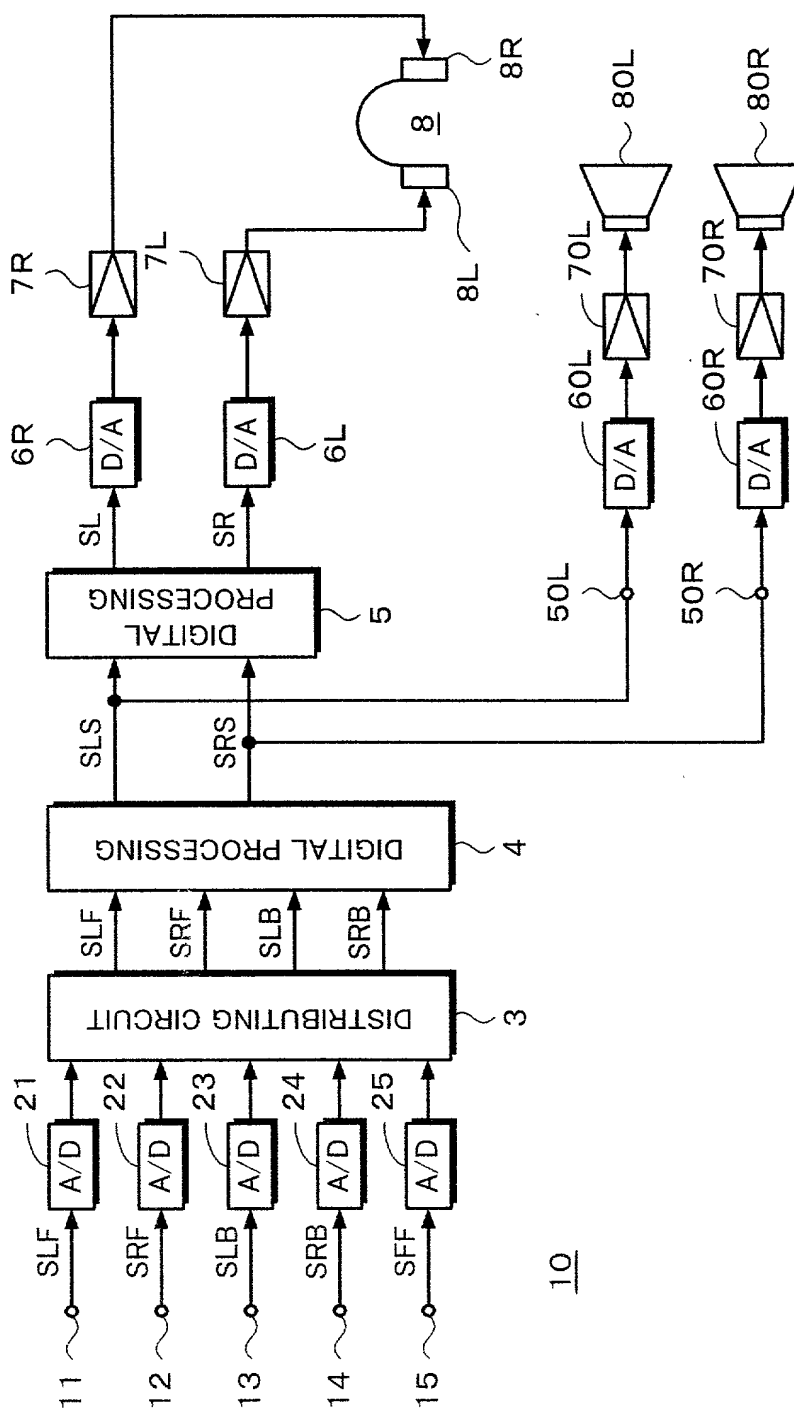


Fig. 12

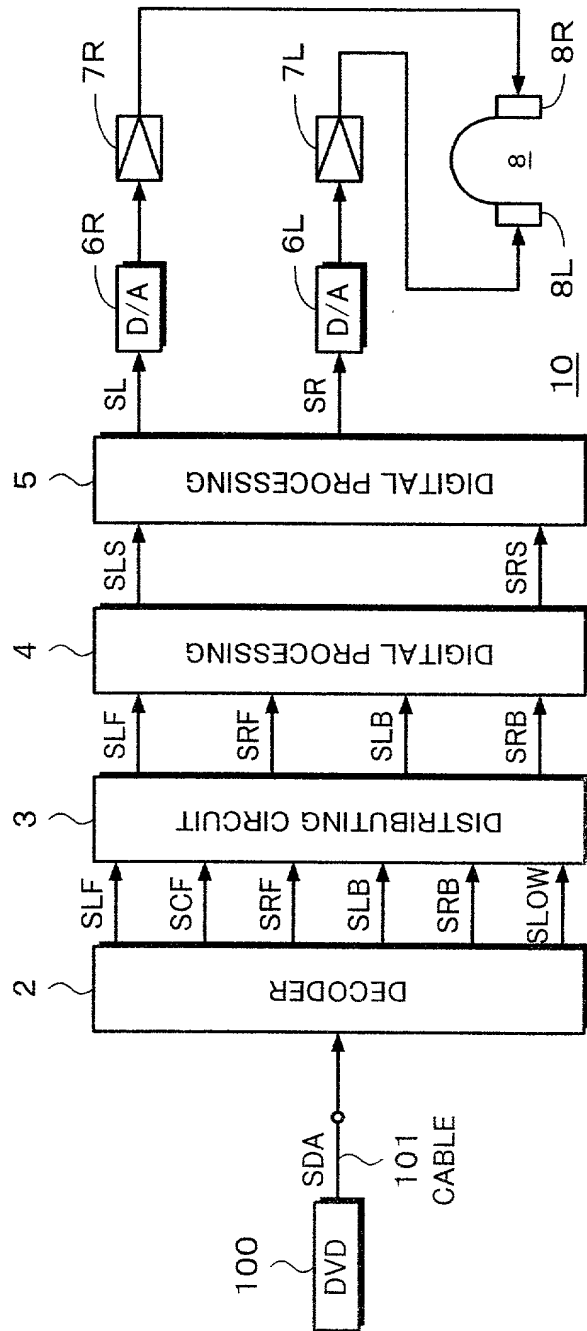


Fig. 13

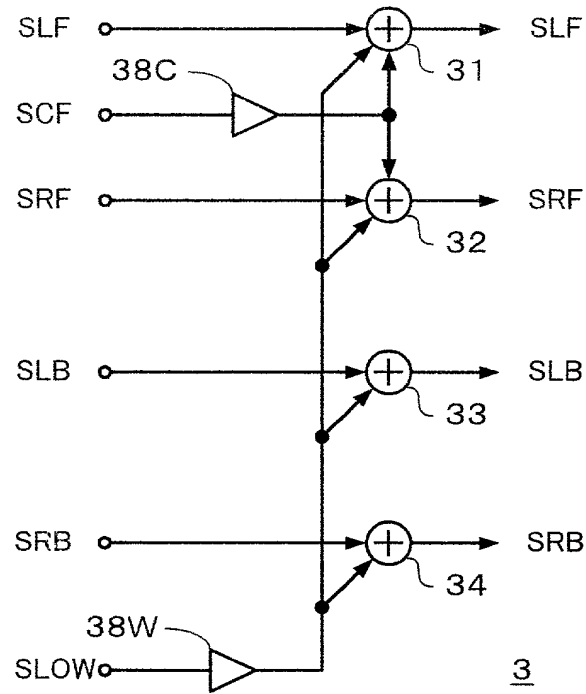


Fig. 14

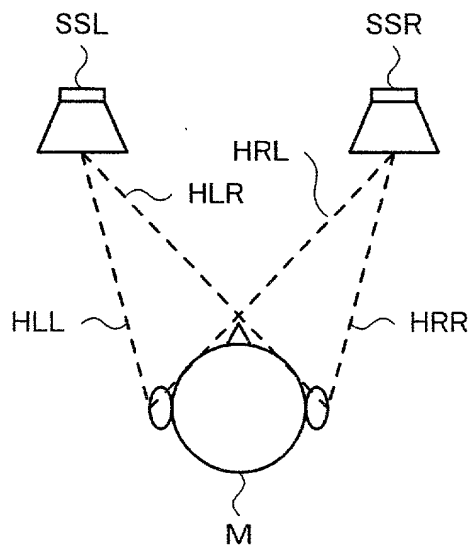


Fig. 15



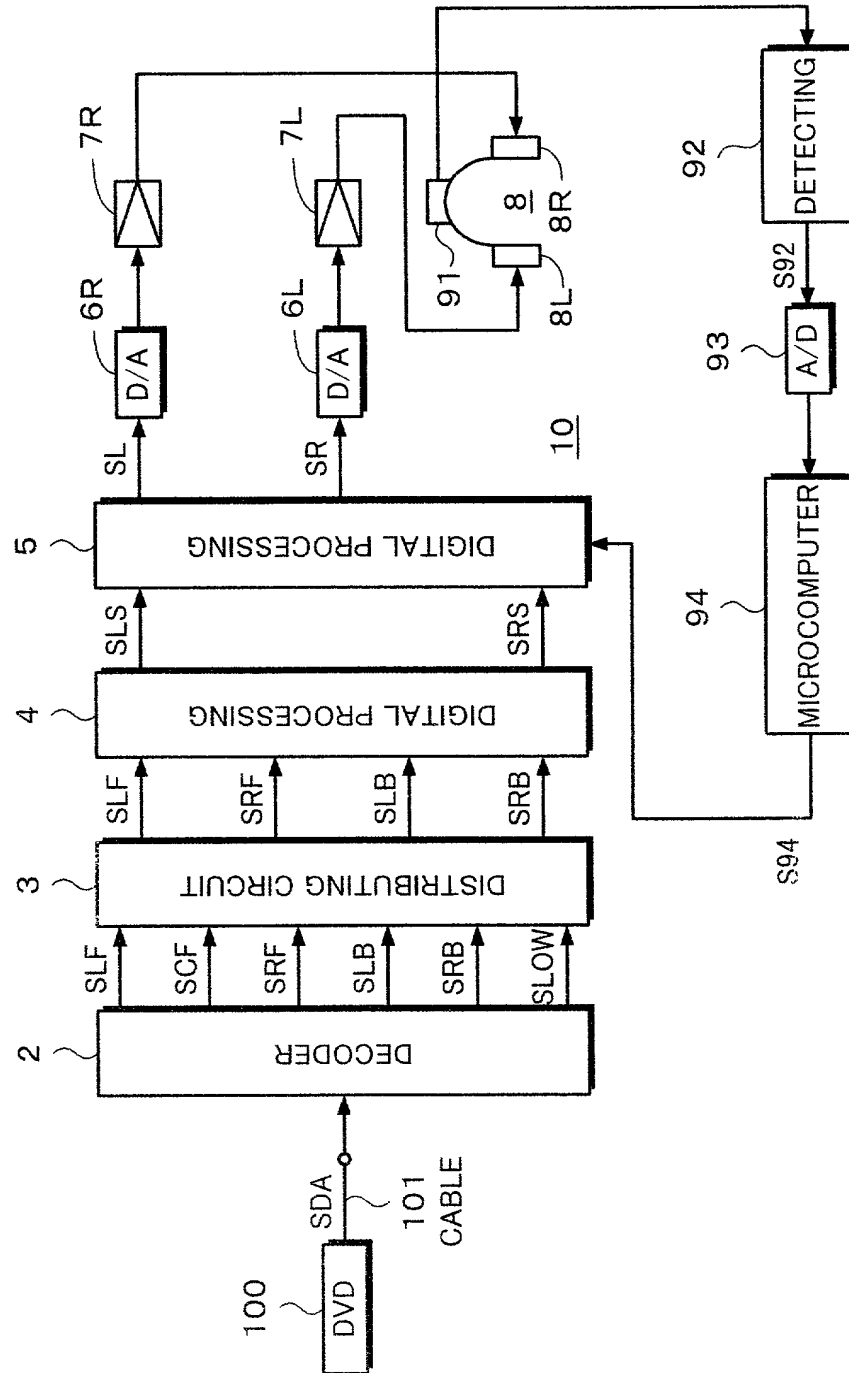
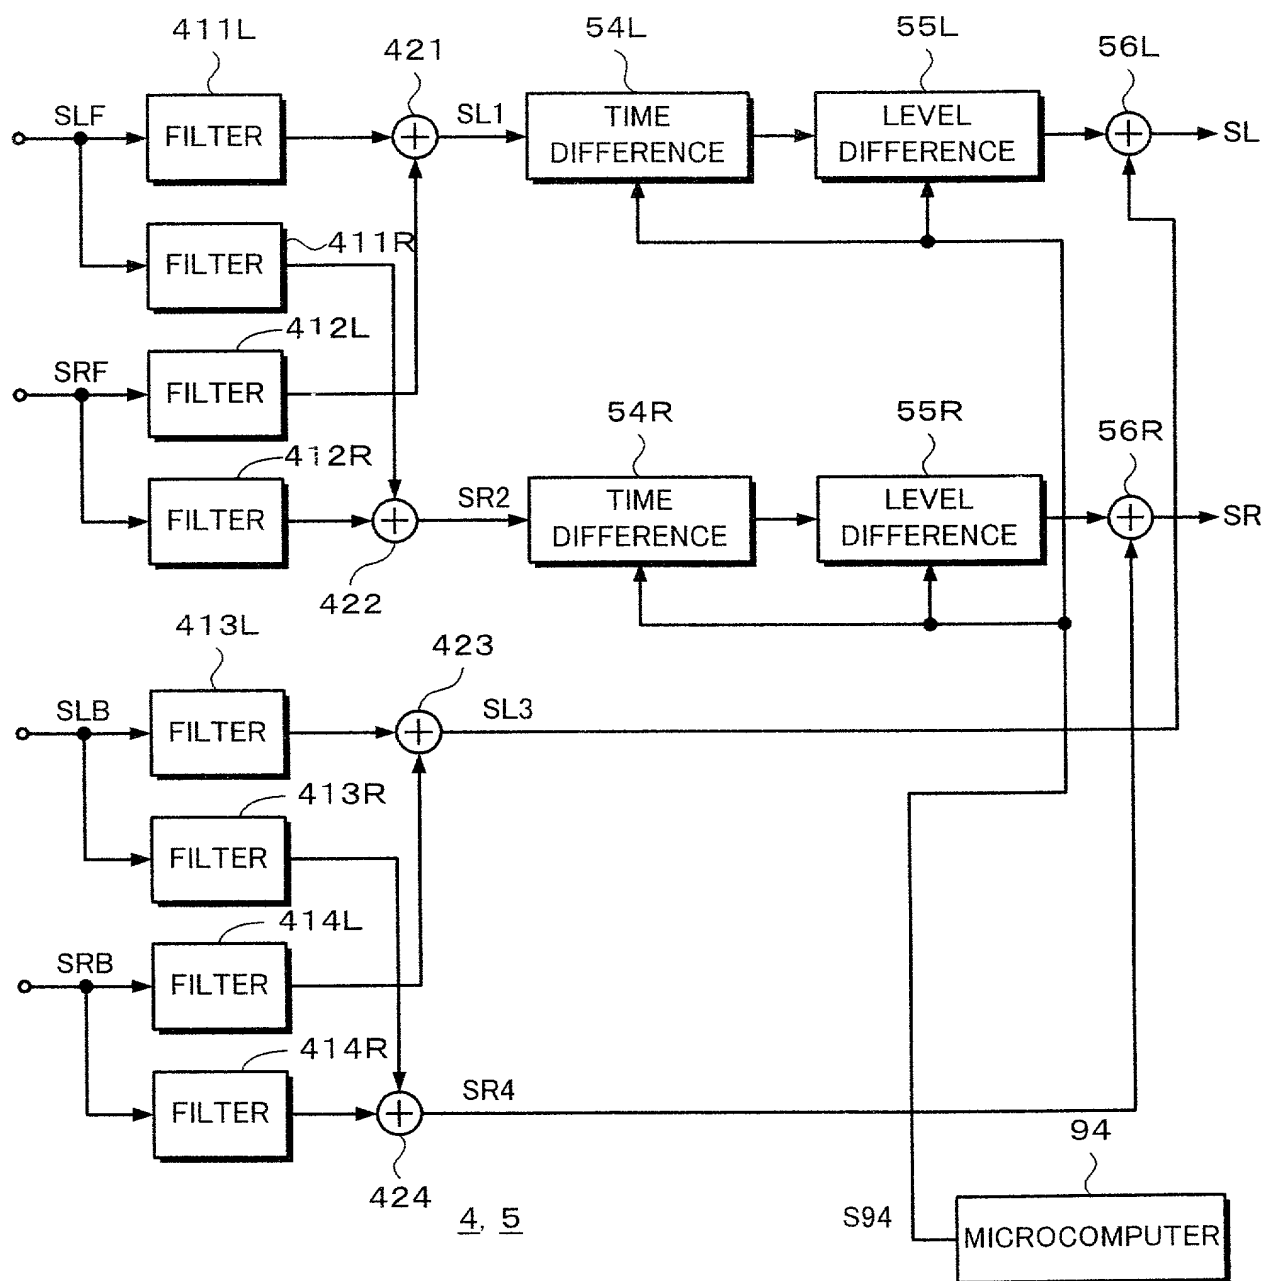
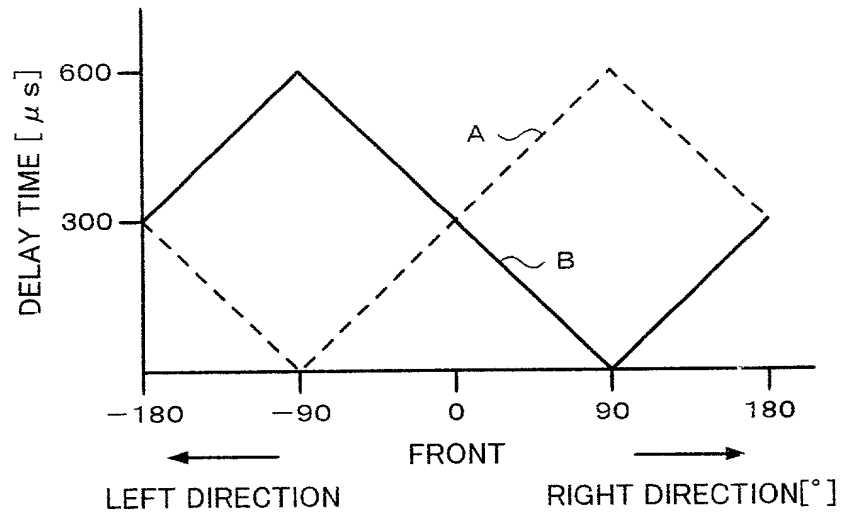


Fig. 16

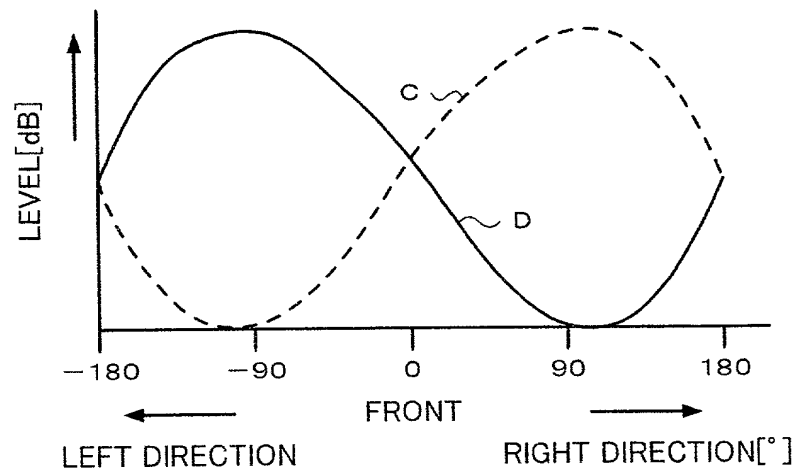

*Fig. 17**Fig. 18*

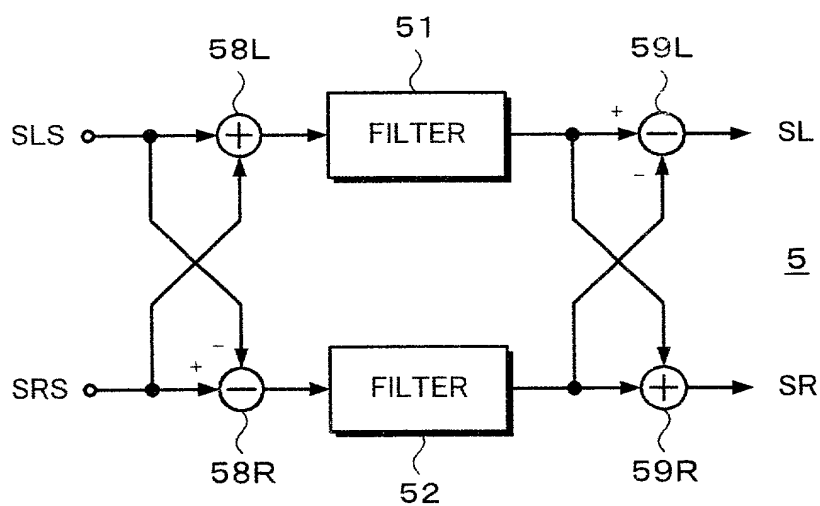

*Fig. 19*

4.. DISTRIBUTING CIRCUIT  
4, 5.. DIGITAL PROCESSING CIRCUIT  
6L, 6R.. D/A CONVERTER  
8.. HEADSETS  
8L, 8R.. ACOUSTIC UNIT  
21 TO 25.. A/D CONVERTER CIRCUIT

Attorney Docket \_\_\_\_\_

## DECLARATION AND POWER OF ATTORNEY

As a below-named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: Audio Reproducing Apparatus

the specification of which  
(check one)

  X   is attached hereto.

       was filed on \_\_\_\_\_ as

Application Serial No. \_\_\_\_\_

and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information of which I am aware which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority Claimed	
<u>Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Yes</u>	<u>No</u>
083810/1998	JAPAN	30/3/1998	<u>  x  </u>	<u>      </u>
<u>      </u>	<u>      </u>	<u>      </u>	<u>      </u>	<u>      </u>
<u>      </u>	<u>      </u>	<u>      </u>	<u>      </u>	<u>      </u>

## Declaration and Power of Attorney

Page 2

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Application Serial No.</u>	<u>Filing Date</u>	<u>Status</u>
_____	_____	_____
_____	_____	_____

And I hereby appoint Jay H. Maioli, Reg. No. 27,213; Donald S. Dowden, Reg. No. 20,701; William E. Pelton, Reg. No. 25,702; Peter J. Phillips, Reg. No. 29,691; Gerald W. Griffin, Reg. No. 18,886; Ivan S. Kavruk, Reg. No. 25,161; Christopher C. Dunham, Reg. No. 22,031; Norman H. Zivin, Reg. No. 25,385; John P. White, Reg. No. 28,678; and Robert D. Katz, Reg. No. 30,141; and each and all of them, all c/o Cooper & Dunham, 1185 Avenue of the Americas, New York, NY 10036 (Tel. (212) 278-0400), my attorneys, each with full power of substitution and revocation, to receive the patent, to transact all business in the Patent and Trademark Office connected therewith and to file any International Applications which are based thereon under the provisions of the Patent Cooperation Treaty.

Please address all communications, and direct all telephone calls, regarding this application to

JAY H. MAIOLI  
Cooper & Dunham LLP  
1185 Avenue of the Americas  
New York, New York 10036  
Tel. (212) 278-0400

Reg. No. 27,213

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or First joint inventor KIYOFUMI INANAGA

Inventor's signature \_\_\_\_\_

*Kiyofumi Inanaga*

Citizenship JAPAN

Date of Signature October 20, 1999

Residence KANAGAWA, JAPAN J P X

Post Office Address c/o SONY CORPORATION, 7-35, Kitashinagawa 6-chome,  
Shinagawa-ku, Tokyo 141-0001, JAPAN

## Declaration and Power of Attorney

Page 3

2 - ∞ Full name of sole or  
Second joint inventor YUJI YAMADA

Inventor's signature \_\_\_\_\_

Citizenship JAPANDate of Signature October 20, 1999Residence TOKYO, JAPAN □PXPost Office Address c/o SONY CORPORATION, 7-35, Kitashinagawa 6-chome,  
Shinagawa-ku, Tokyo 141-0001, JAPANFull name of sole or  
Third joint inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_

Citizenship \_\_\_\_\_

Date of Signature \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of sole or  
Fourth joint inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_

Citizenship \_\_\_\_\_

Date of Signature \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of sole or  
Fifth joint inventor \_\_\_\_\_

Inventor's signature \_\_\_\_\_

Citizenship \_\_\_\_\_

Date of Signature \_\_\_\_\_

Residence \_\_\_\_\_

Post Office Address \_\_\_\_\_